


Flexible bellows connectors are used to correct mis-alignment and relieve stress in glassware assemblies. Connect directly to standard ground glass joints where trapezoidal sealing rings give medium to high vacuum performance.

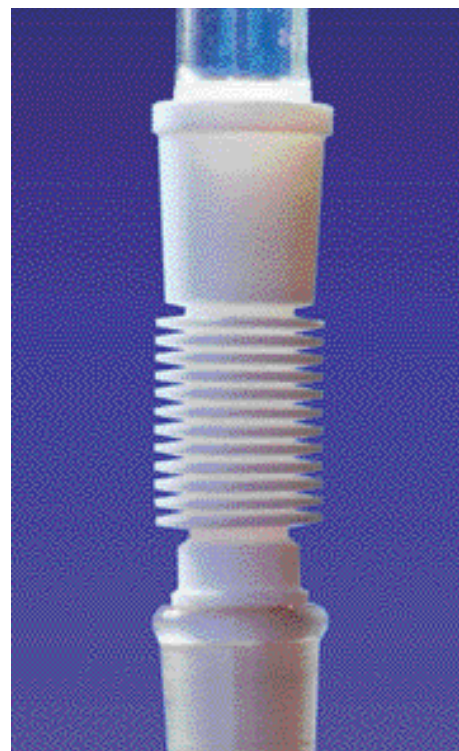


“A” LENGTH JOINTS - USA

Ref No.	Socket	Cone	H
BELL1435ALJ	14/35	14/35	115
BELL1938ALJ	19/38	19/38	120
BELL2440ALJ	24/40	24/40	130
BELL2942ALJ	29/42	29/42	140
BELL3445ALJ	34/45	34/45	145

“B” LENGTH JOINTS - EUROPE

Ref No.	Socket	Cone	H
BELL1423BLJ	14/23	14/23	90
BELL1432BLJ	14/23	29/32	110
BELL1926BLJ	19/26	19/26	100
BELL1929BLJ	19/26	24/29	105
BELL2429BLJ	24/29	24/29	110
BELL2932BLJ	29/32	29/32	115
BELL2935BLJ	29/32	34/35	120
BELL3435BLJ	34/35	34/35	120

STOPPERS

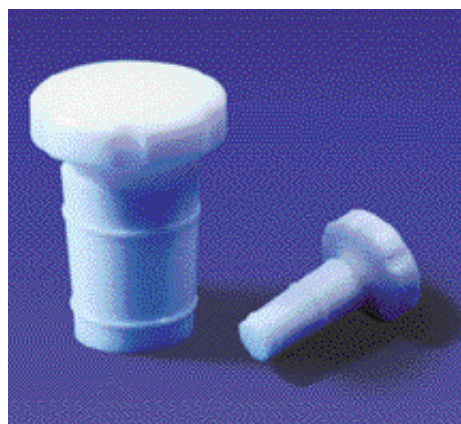

Fits standard ground glass joints. Trapezoidal seals give medium to high vacuum performance.


“A” LENGTH CONE - USA

Ref No.	Joint	H
STP1030ALC	10/30	40
STP1435ALC	14/35	46
STP1938ALC	19/38	50
STP2440ALC	24/40	55
STP2942ALC	29/42	57
STP3445ALC	34/45	60

“B” LENGTH CONE - EUROPE

Ref No.	Joint	H
STP1019BLC	10/19	31
STP1423BLC	14/23	34
STP1926BLC	19/26	38
STP2429BLC	24/29	44
STP2932BLC	29/32	47
STP3435BLC	34/35	51

FUNNELS

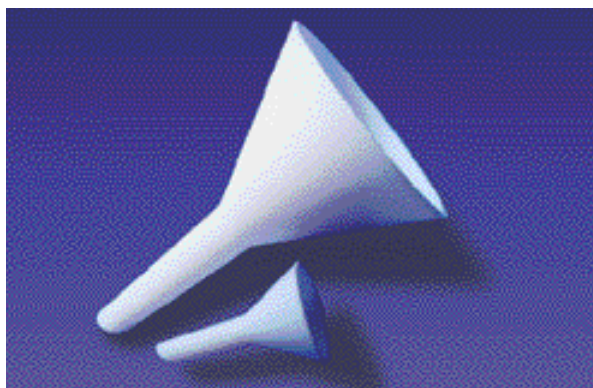

Smooth internal finish.

Ref No.	Ø	Stem Ø	H
FUN0850FUN	30	8	50
FUN1085FUN	50	10	85
FUN1211FUN	70	12	110
FUN1417FUN	100	14	170
FUN1622FUN	150	16	220